



# Replacement Notes for : ETS, 10-pin

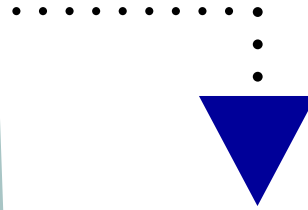

## Installations Notes:

10-pin ETS ballast, pictured at left, is replaced by the FA100 ballast using the existing input harness from the tanning unit. The existing 8-pin output harness from the tanning unit plugs directly into the FA100 output connector. Note that the input and output connectors are on opposite ends of the FA100.

Typical Applications:  
ETS

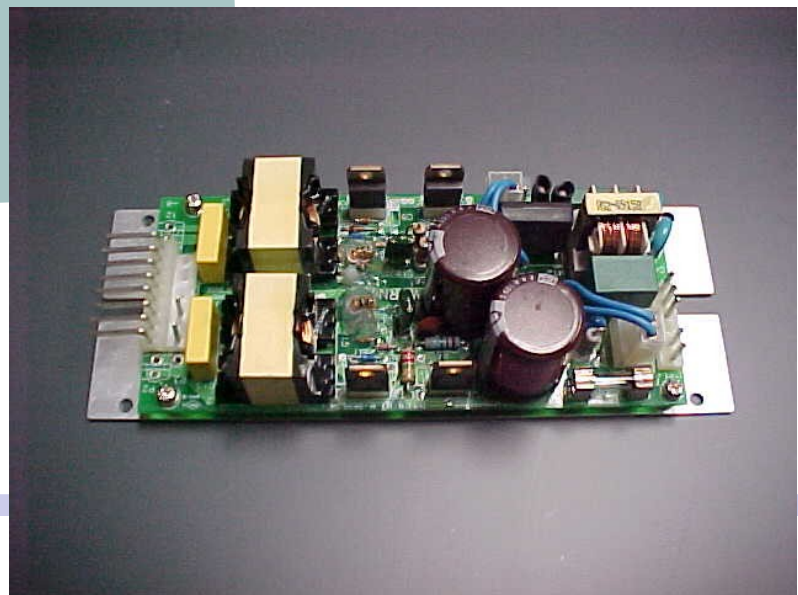

FOR TECHNICAL SUPPORT CALL (978) 249-6474



