
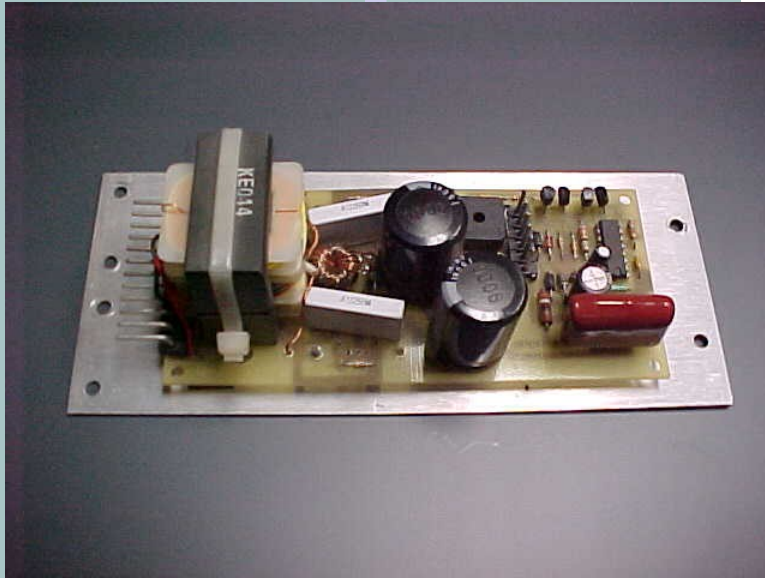


Replacement Notes for : FST 12-pin, Double

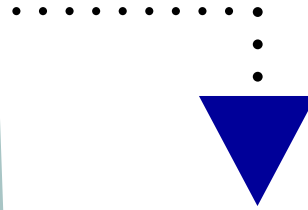


Installations Notes:

The double FST 12-pin replacement ballast, pictured at left, is replaced by the FA100 ballast using the existing input harness from the tanning unit and adapter harness 8-12OUT-F for the output, as pictured below. Note that some input harnesses may have different spacing of the two wires. This ballast was typically used as a replacement for Fyrnetic style ballasts.

Typical Applications:

Sun Industries, Shaw, DPRM

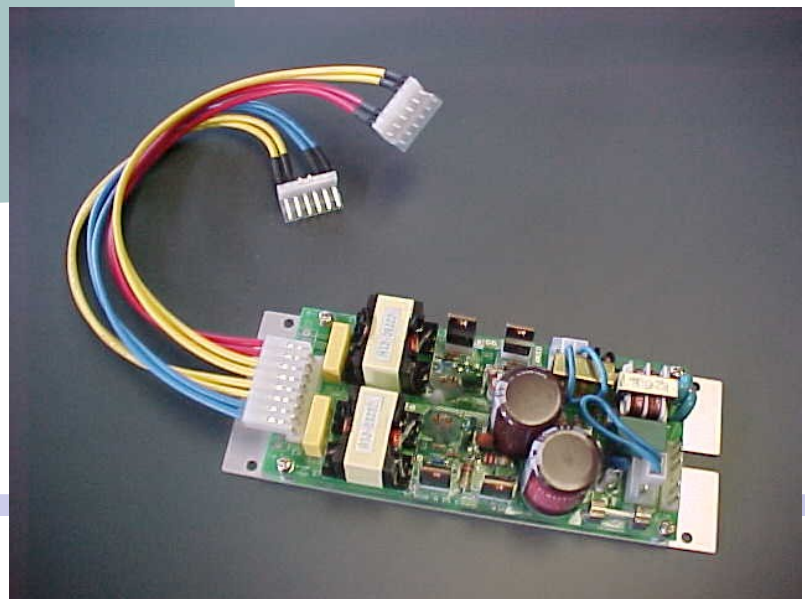

FOR TECHNICAL SUPPORT CALL (978) 249-6474

