


Replacement Notes for : Fyrnetic, Double




Installations Notes:

The double Fyrnetic ballast, pictured at left, is replaced by the FA100 ballast using the existing input harness from the tanning unit and adapter harness 8-12OUT-F for the output, as pictured below. Note that only one of the two existing input harnesses from the tanning unit will be necessary to power the FA100.

Typical Applications:

Sun Industries, Shaw, DPRM

Some of these ballasts were labeled as 9100.

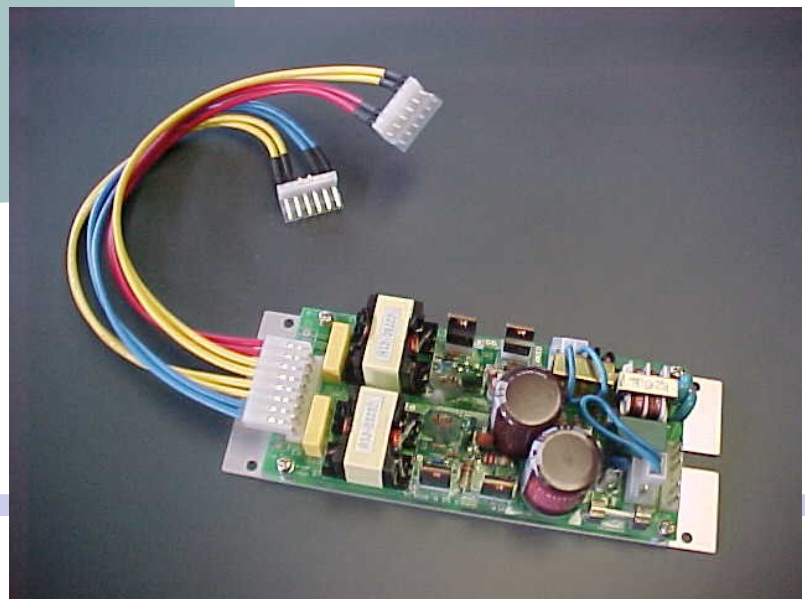

FOR TECHNICAL SUPPORT CALL (978) 249-6474

