
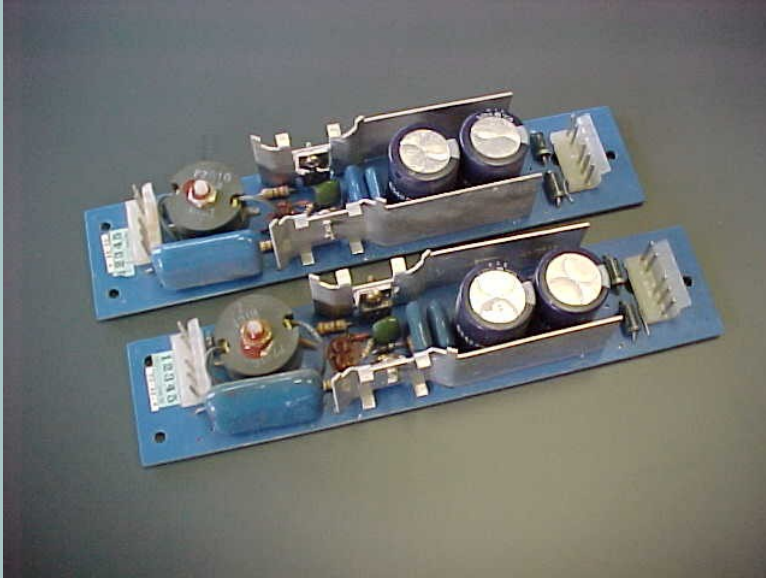


Replacement Notes for : Fyrnetic, Single

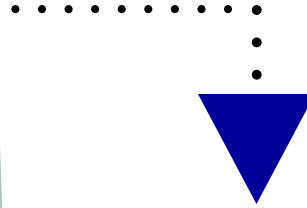


Installations Notes:

One or two single Fyrnetic ballasts, pictured at left, are replaced by the FA100 ballast using the existing input harness from the tanning unit and adapter harness 8-12OUT-F for the output, as pictured below. If the FA100 is used to replace one Fyrnetic ballast, simply leave the other output of the 8-12OUT-F harness unconnected. This will not harm the ballast.

Typical Applications:

Sun Industries, Sunshaw, DPRM, Sunstar, Solaire, American Wolff
Some of these ballasts were labeled as 9160.

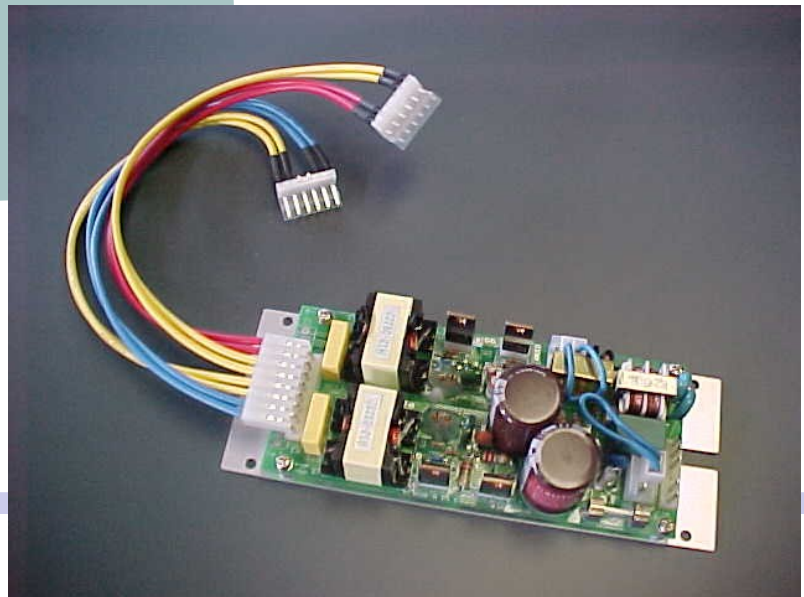

FOR TECHNICAL SUPPORT CALL (978) 249-6474

