



Replacement Notes for : Triad

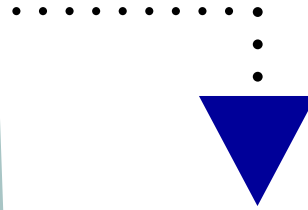

Installations Notes:

Triad ballast, pictured at left, is replaced by the FA100 ballast using adapter harnesses 2-2IN-K for the input and 8-8OUT-K for the output, as pictured below. The 9.5" x 2.5" extended mounting plate is included to match the mounting footprint of the original ballast.

Typical Applications:
Sun Industries

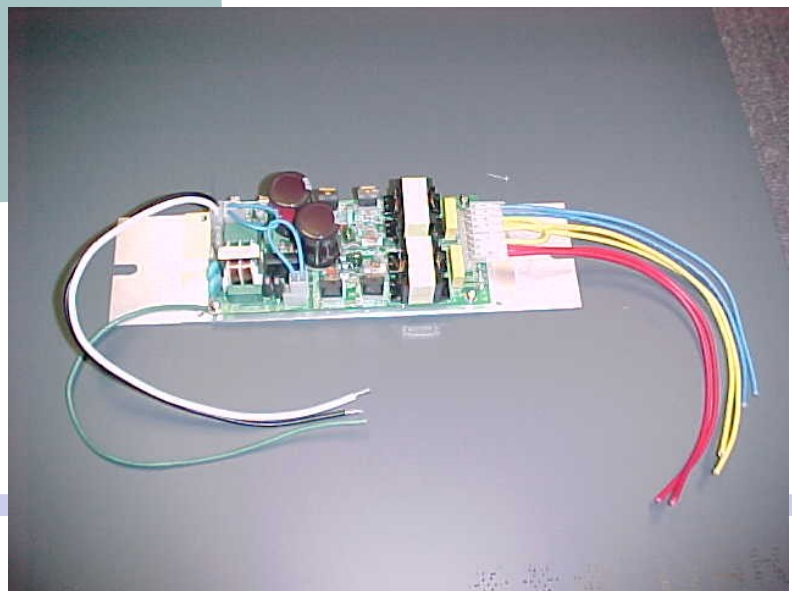

FOR TECHNICAL SUPPORT CALL (978) 249-6474



